

# Lightweight

## ACCESS DOOR

Babcock-Davis' non-rated insulated Lightweight Access Door offers a solution to larger openings in ceiling applications. The door is available in pre-finished, embossed, galvanized steel and aluminum door skins.

### DETAILS

**DOOR** 26 gauge Steel, Embossed

**FRAME** .045 inch 6063-T5 Extruded Aluminum

### SIZE

- Min: 12 inches by 12 inches
- Max: 18 inches by 72 inches, 24 inches by 60 inches or 48 inches by 48 inches

**INSTALLATION** Ceiling or Wall

**FLANGE** Rolled 1-5/16 inches Wide

**HINGE** Aluminum Continuous Piano

### FINISH

- Door Skin: Steel, White Embossed
- Frame: Aluminum, Clear Anodized

**INSULATION** 3/4 inch Polystyrene, R-3.8



### ORDER GUIDE

BASE	LATCH	WIDTH	X	LENGTH	OPTIONS
<b>BLW</b>			<b>X</b>		
	<b>L</b> Key Operated Cam Lock	Standard Sizes (W x L)			<b>A</b> Aluminum Panel Insert
	<b>T</b> Screwdriver Cam Latch	12" x 12"	24" x 24"	30" x 36"	<b>G</b> Gasketing
		18" x 18"	24" x 36"	48" x 48"	
		22" x 30"	24" x 48"	60" x 48"	
		22" x 36"	30" x 30"	72" x 48"	

Rough opening is door size + 1/4 inch minimum. Additional sizes available, call for more information.  
\*Double door construction.

# Plastic

## ACCESS DOOR

The Plastic Access Door provides an economical alternative to traditional materials and is ideal for light-duty applications. The removable panel is easily installed - no fasteners required.

### DETAILS

**DOOR** 1/8 inch High Impact Styrene, Removable

**FRAME** Reversible 3/4 inch Flange

### SIZE


- Min: 4 inches by 6 inches
- Max: 22 inches by 22 inches

**INSTALLATION** Ceiling or Wall

**FLANGE** Exposed

**LATCH** Snap Latch

**FINISH** White, Texturized

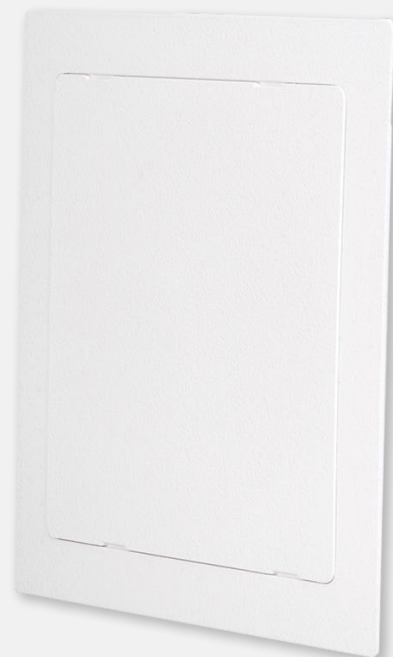

### ORDER GUIDE

BASE	WIDTH	X	LENGTH
<b>BPL</b>		<b>X</b>	
	Standard Sizes (W x L)		
	4" x 6"	14" x 14"	
	6" x 9"	14" x 29"	
	8" x 8"	22" x 22"	
	12" x 12"		

