



**ENTRANCE MAT - Activ-Mat™ EM700 Series - Aluminum Roll-Up Mat**

EFSA



**EFSA7:** Surface-mounted tapered aluminum frame for installation by anchoring to floor. 3/8" (9.5 mm) deep by 1-7/8" (476 mm) gives traction to the full width of the mat. End filler is provided at both ends for a snug fit.

EFSV



**EFSV7:** Surface-mounted tapered frame for a moveable installation. 2" (50.8 mm) wide durable black vinyl with serrations to reduce slipping is attached mechanically to tread rails. Order in full tread-width increments.

EFST



**EFST7:** Surface-mounted tapered vinyl frame with integral rubber tray under entire mat. Clean up of debris that falls under the mat is easy, and protects flooring. Order in full tread-width increments.

**ACTIV-MAT™ 700 SERIES:**

**LDPE HINGES, ECONOMICAL, LOW PROFILE, MEDIUM DUTY**

The 700 Series mat combines the benefit of tread with aluminum scraping bars built in to each rail to keep your building cleaner. Available as surface-mounted or recessed.

**FEATURES:**

- LDPE hinges that cushion each tread rail are quieter than aluminum hinges.
- Mat rolls up compactly for cleaning.
- Drainage holes between tread rails allows moisture and dirt to fall below mat.

**PRODUCT DETAILS:**

**Rail Material:** 6063-T6 extruded aluminum alloy

**Frame Material:**

EFRA & EFRT: 6063-T6 extruded aluminum alloy

EFSV & EFRC: 6063-T5 extruded aluminum alloy

EFSV: Vinyl tapered

EFST: Vinyl tapered frame with integral recycled rubber tray.

**Depth:** 3/8" (9.5 mm)

**Standard Finish:** Mill.

**Tread Spacing:** 2" (50.8 mm) on center with 6 treads per foot in the direction of travel.

**Spacing Between Rails:** Heel-proof spacing of 3/16"

**Rolling Wheel Load Rating:** 350 lbs

**NOTE:**

Verify traffic direction - traffic to run perpendicular to rails.

Maximum single mat size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.



If multiple sections, verify sectioning does not occur in traffic path.

EFRC, EFRA and EFSV: Vinyl filler to be trimmed in field for tight fit.

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found at [www.activarcpg.com/jl-industries](http://www.activarcpg.com/jl-industries)

**ACTIV-MAT 700 SERIES INSERTS**

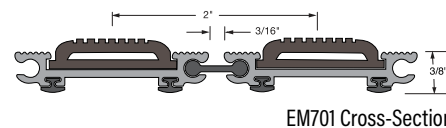

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide



JL INDUSTRIES


**Entrance Mat  
Activ-Mat™ EM700 Series  
Data Sheet**

Distributed by  
[www.Ameraproducts.com](http://www.Ameraproducts.com)  
Phone: (800) 608-6568  
Fax: (409) 840-5545  
[info@ameraproducts.com](mailto:info@ameraproducts.com)




**ENTRANCE MAT - Activ-Mat™ EM700 Series - Aluminum Roll-Up Mat**

EFRA

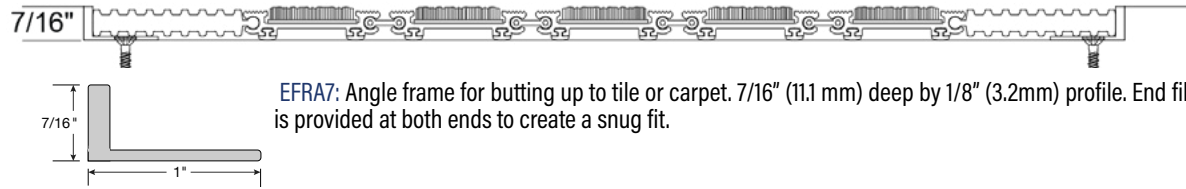


**EFRA7:** Angle frame for butting up to tile or carpet. 7/16" (11.1 mm) deep by 1/8" (3.2mm) profile. End filler is provided at both ends to create a snug fit.

EFRC

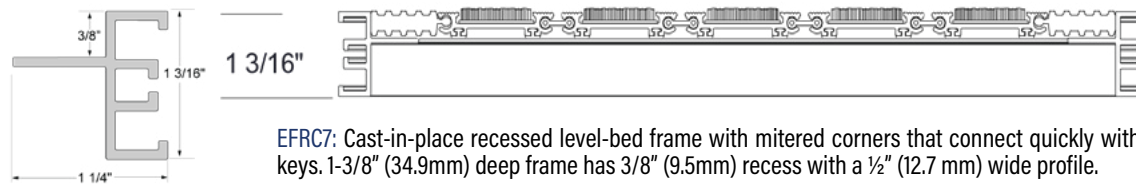



**EFRC7:** Cast-in-place recessed level-bed frame with mitered corners that connect quickly with corner keys. 1-3/8" (34.9mm) deep frame has 3/8" (9.5mm) recess with a 1/2" (12.7 mm) wide profile.

EFRT

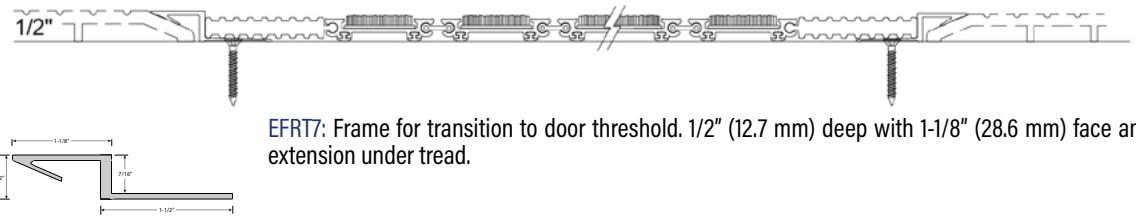

**EFRT7:** Frame for transition to door threshold. 1/2" (12.7 mm) deep with 1-1/8" (28.6 mm) face and 1-1/2" extension under tread.

**ACTIV-MAT 700 SERIES INSERTS**

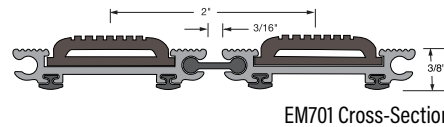

**ACTIV-MAT™ 700 SERIES:**

**LDPE HINGES, ECONOMICAL, LOW PROFILE, MEDIUM DUTY**

The 700 Series mat combines the benefit of tread with aluminum scraping bars built in to each rail to keep your building cleaner. Available as surface-mounted or recessed.

**FEATURES:**

- LDPE hinges that cushion each tread rail are quieter than aluminum hinges.
- Mat rolls up compactly for cleaning.
- Drainage holes between tread rails allows moisture and dirt to fall below mat.

**PRODUCT DETAILS:**

**Rail Material:** 6063-T6 extruded aluminum alloy

**Frame Material:**

EFRA & EFRT: 6063-T6 extruded aluminum alloy

EFSa & EFRC: 6063-T5 extruded aluminum alloy

EFSV: Vinyl tapered

EFST: Vinyl tapered frame with integral recycled rubber tray.

**Depth:** 3/8" (9.5 mm)

**Standard Finish:** Mill.

**Tread Spacing:** 2" (50.8 mm) on center with 6 treads per foot in the direction of travel.

**Spacing Between Rails:** Heel-proof spacing of 3/16".

**Rolling Wheel Load Rating:** 350 lbs

**NOTE:**

Verify traffic direction - traffic to run perpendicular to rails.

Maximum single mat size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.

If multiple sections, verify sectioning does not occur in traffic path.

EFRC, EFRA and EFSa: Vinyl filler to be trimmed in field for tight fit.

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found at [www.activarcpg.com/jl-industries](http://www.activarcpg.com/jl-industries)



9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide



JL INDUSTRIES

**Entrance Mat  
Activ-Mat™ EM700 Series  
Data Sheet**

Distributed by  
[www.Ameraproducts.com](http://www.Ameraproducts.com)  
Phone: (800) 608-6568  
Fax: (409) 840-5545  
[info@ameraproducts.com](mailto:info@ameraproducts.com)

