

ENTRANCE MAT - Activ-Mat™ EM700 Series with EFRA7 Frame - Aluminum Grate with Recessed Aluminum Angle Frame

SPECIFICATIONS:

Aluminium Roll-Up Entrance Mat with LDPE Hinges
 Material: 6063-T6 extruded aluminum alloy tread rails and frames.

Depth: 3/8" (9.5 mm).

Standard Finish: Mill.

Tread Spacing: 2" (50.8mm) on center with 6 treads per foot in the direction of travel.

Spacing Between Rails: Heelproof spacing of 3/16"

Rolling Wheel Load Rating: 350 lbs

NOTE:

Verify traffic direction - traffic to run perpendicular to rails.



Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.

If multiple sections, verify sectioning does not occur in traffic path.

Vinyl filler to be trimmed in field for tight fit.

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found on our website.

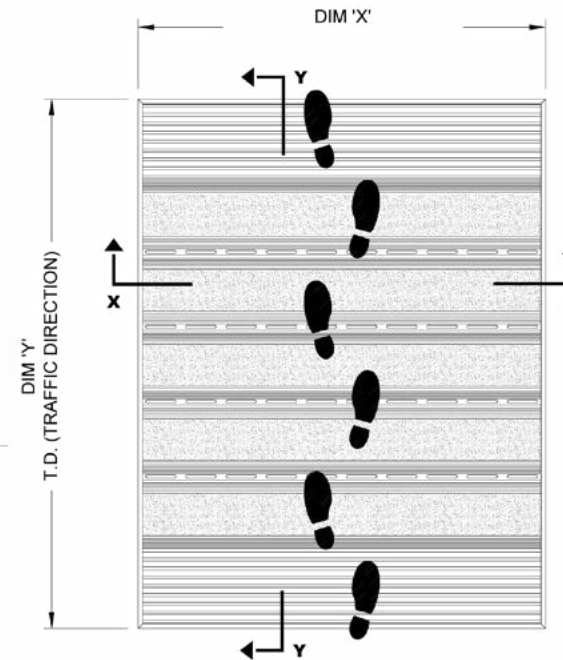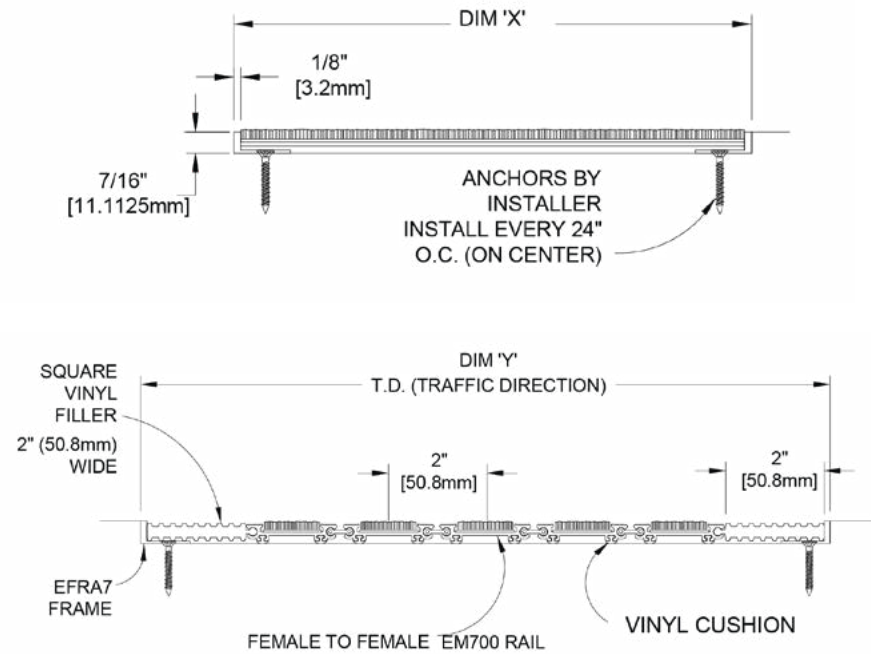

ACTIV-MAT 700 SERIES INSERTS



Distributed by
www.Ameraproducts.com
 Phone: (800) 608-6568
 Fax: (409) 840-5545
 info@ameraproducts.com



QTY	LOCATION	DIMENSION "X" <small>Width</small>	DIMENSION "Y" <small>Length</small>	FINISH	TREAD OPTIONS	TREAD COLOR	NOTES



9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:		Project:
Contractor:		Approved By:
Date:		Architect:
Scale: N/A	Pages: 1 of 1	Item #: